





RoHS GP HF

REV.	ECR/N NO.	DESCRIPTION	DRAWN	DATE
A	/	NEW	HAIXIANG	2017/02/15

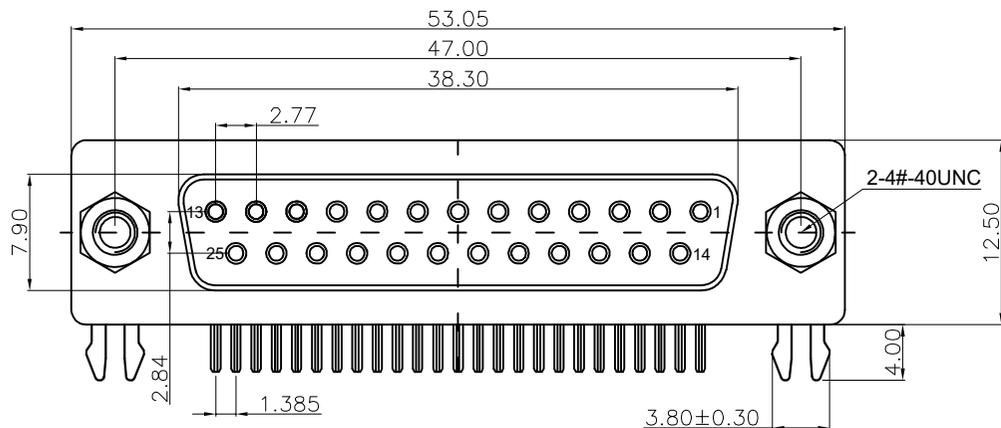


NOTES:

- MATERIAL:
 - HOUSING: PBT+30%GF,UL94V-0,COLOR: BLACK.
 - CONTACT: BRASS,
 - SHELL: SPCC,
 - BOARD LOCK: SPCC,
 - SCREW: SPCC.
- FINISH:
 - CONTACTS: GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER AREA, NI UNDERPLATED OVERALL.
 - SHELL: NI PLATED.
 - BOARD LOCK: TIN PLATED.
 - SCREW: NI PLATED.
- SPECIFICATIONS:
 - CURRENT RATING: 3 A
 - CONTACT RESISTANCE: 30 mΩ Max.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500VAC/MINUTE.

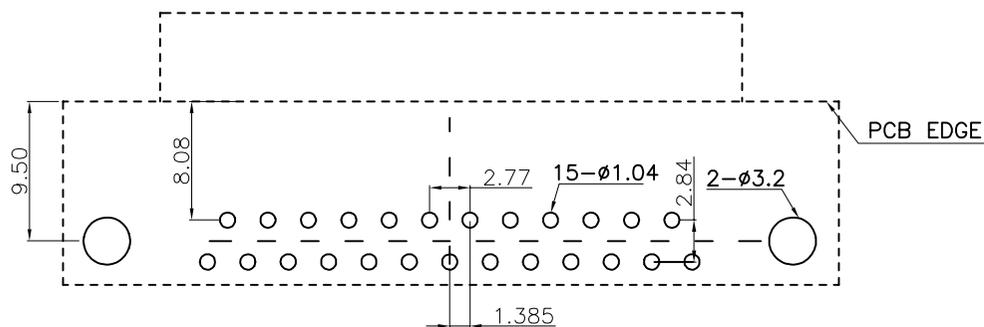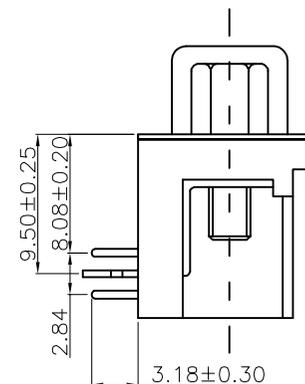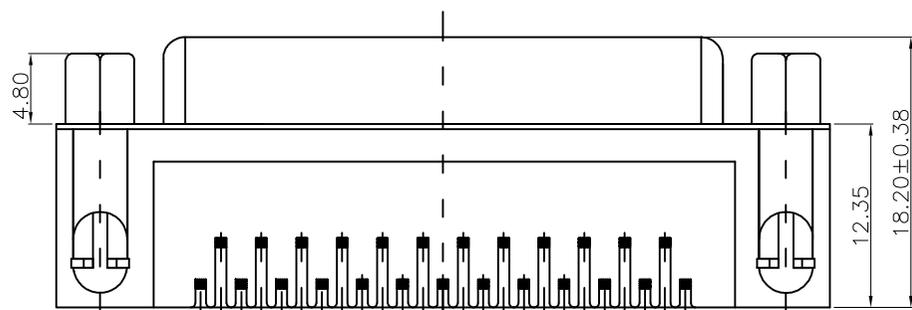

PCB LAYOUT

TOLERANCE	MODEL NAME: DR 25母 黑胶 直锁4.8螺丝	DRAWN: HUANGHAIXIANG
X.X ±0.35	MODEL NO: WLDR-065A	CHECKED: YAOSHIXUAN
X.XX ±0.25	UNIT: SCALE: REVISION: SHEET	APPROVED: WUHUAMING
X.XXX ±0.10	mm 1:1 A 1/1	DATE: 2017/02/15
ANGLE ±2.0°	 WALCO 深圳市兴万联电子有限公司 SHENZHEN XING WAN LIAN ELECTRONICS CO.,LTD.	DWG NO:
		FILE: C