


RoHS GP HF

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
A		NEW		





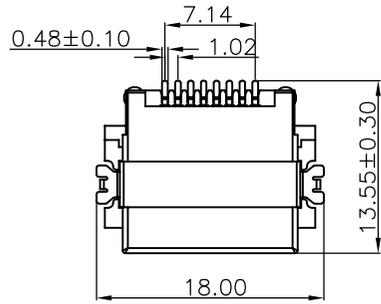


MATERIAL:
 1.HOUSING:LCP UL94V-0; Color: Black
 2.CONTACT:C5191, T=0.30±0.02mm
 3.SHELL:C2680, T=0.20±0.02mm

PLATED:
 CONTACT: G.F Plated On Contact Area;
 80u" Tin Plated On Solder Area.
 Nickel 50u" Underplating Over All.

SHELL: Nickel 80u" Underplating Over All.


ELECTRICAL:
 1. CONTACT RESISTANCE: 20mΩ MAX.
 2. INSULATION RESISTANCE: 500MΩ MIN.
 3. DIELECTRIC WITHSTANDING VOLATAGE: 1000V/AC 1 MINUTE

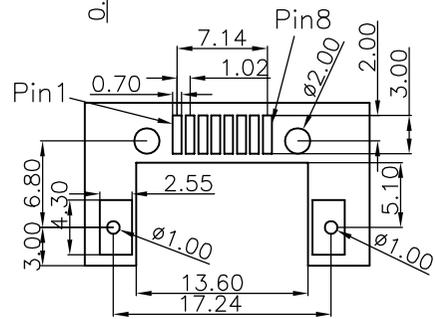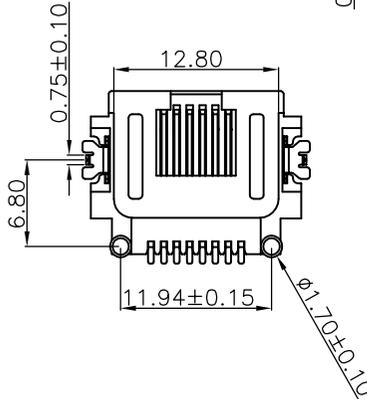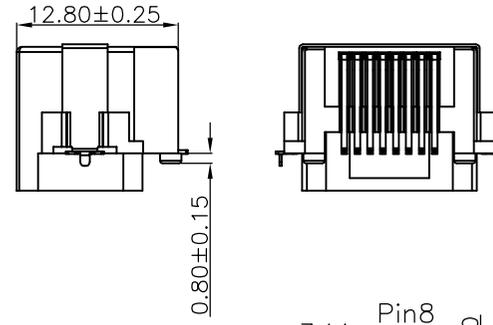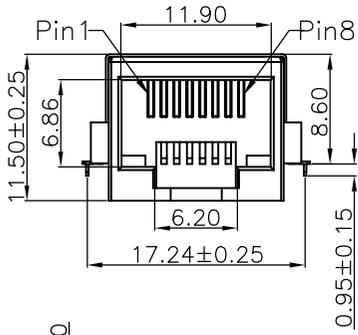

PCBLAYOUT TOP VIEW
TOL ±0.05

针脚定义:

Pin位	Name	Description
1	TX+	Tranceive Data+ (发信号+)
2	TX-	Tranceive Data- (发信号-)
3	RX+	Receive Data+ (收信号+)
4	N/C	Not connected (空脚)
5	N/C	Not connected (空脚)
6	RX-	Receive Data- (收信号-)
7	N/C	Not connected (空脚)
8	N/C	Not connected (空脚)

Tolerance X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 Angle ±2.0°	Model Name: RJ45 8P8C 沉板式 SMT 无灯无弹 反向 LCP黑色 外壳膜带式半包 载带包装				Drawing: DENGJU
	Model No: WLRJ-160A				Checked: YAOSHIXUAN
	UNIT:	SCALE:	REVISION:	SHEET	Approved: WUHUAMING
	mm	FULL	A	1/1	Date: 2016.08.17
 深圳市兴万联电子有限公司 SHENZHEN XINGWANLIAN TECHNOLOGY CO.,LTD				DWG NO.	
				FILE: C	